 <b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new nonprovisional applications under 37 CFR 1.53(b)) Check Box, if applicable <input type="checkbox"/> Duplicate	Attorney Docket No.	<b>980511B</b>	Total Pages	
	First Named Inventor or Application Identifier			
	<b>Yosuke SHIRATA</b>			
	Express Mail Label No.			
	PAGE 1 OF 3			

JCI 60 U.S. PTO  
 09/084838  
 10/10/00

APPLICATION ELEMENTS FOR: <b>LITHOGRAPHY SYSTEM AND METHOD</b>	ADDRESS TO: Director of Patents and Trademarks BOX PATENT APPLICATIONS Washington, D.C. 20231
---	---

1. ☒ Fee Transmittal Form (Incorporated within this form)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification Total Pages **[29]**
3. ☒ Drawing(s) (35 USC 113) Total Sheets **[2]**
4. ☒ Oath or Declaration Total Pages **[2]**
  - a. ☐ Newly executed (original or copy)
  - b. ☒ Copy from prior application (37 CFR 1.63(d) (for continuation/divisional with Box 17 completed)).
    - i. ☐ Deletion of Inventor(s)  
Signed statement attached deleting inventor(s) named in prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☒ Incorporation by reference (usable if box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement Verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

8. a. ☐ Assignment Papers (cover sheet and documents)
- b. ☒ Assignment Papers to NIKON CORPORATION in the prior Application Serial No. 09/055,954, filed on July 6, 1998 has been recorded at Reel 9293, Frame 0874 on July 6, 1998.
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney  
Docket No.

980511B

First Named Inventor or Application Identifier

Yosuke SHIRATA

PAGE 2 OF 3

10. ☐ English translation Document (if applicable)

11. ☒ Information Disclosure Statement ☐ Copies of IDS Citations

12. ☒ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)

14. ☐ Small Entity status is claimed.

15. ☒ Claim for Convention Priority ☐ Certified copy of Priority Document(s)

a. Priority of Japanese application no. 9-103814 filed on April 7, 1997 is claimed under 35 USC 119. The certified copy has been filed in prior application Serial No. 09/055,954. (For Continuing Applications, if applicable).

16. ☐ Other \_\_\_\_\_

17. ☒ If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☒ Continuation ☐ Division ☐ Continuation-in-part (CIP) of prior application no. 09/350,923

a. ☒ Please amend the specification by inserting after the title: --This application is a continuation of prior application Serial No. 09/350,923 filed July 12, 1999, which is a continuation of prior application Serial No. 09/055,954 filed April 7, 1998 --.

b. ☐ Cancel in this application original claims \_\_\_ of the prior application before calculating the filing fee.

JC760 U.S. PTO  
09/684898  
10/10/00

## FEE TRANSMITTAL

The filing fee is calculated below

	Number Filed	Number Extra	Rate	Basic Fee
Total Claims	29 - 20	9	x \$18.00	\$162.00
Independent Claims	8 - 3	5	x \$80.00	\$400.00
Multiple Dependent Claims			\$270.00	
Basic Filing Fee				\$1272.00
Reduction by 1/2 for small entity				
Fee for recording enclosed Assignment			\$40.00	
TOTAL				\$1272.00

# UTILITY PATENT

## APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No.

980511B

First Named Inventor or Application Identifier

Yosuke SHIRATA

PAGE 3 OF 3

☒ [XX] A check in the amount of \$ 1,272.00 is enclosed to cover the filing fee.

☐ [ ] Please charge our Deposit Account No. **01-2340** in the total amount of \_\_\_\_\_ to cover the filing fee and the \_\_\_\_\_ assignment recordation fee. A duplicate of this sheet is attached.

☒ [XX] The Commissioner is hereby authorized to charge payment for any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Deposit Account No. **01-2340**. A duplicate of this sheet is attached.

### 18. CORRESPONDENCE ADDRESS

ARMSTRONG, WESTERMAN, HATTORI  
McLELAND & NAUGHTON  
1725 K Street, N.W. Suite 1000  
Washington, D.C. 20006  
Telephone: (202) 659-2930  
Facsimile: (202) 887-0357

### SUBMITTED BY

Typed or Printed Name **Donald W. Hanson** Reg. No. 27,133

Signature  Date: October 10, 2000

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re the Continuation Application of S.N. **09/350,923**:

**Yosuke SHIRATA**

Serial No.: **NEW**

Group Art Unit: **2851** (Expected)

Filed: **October 10, 2000**

Examiner: **NGUYEN H.** (Expected)

For: **LITHOGRAPHY SYSTEM AND METHOD**

**PRELIMINARY AMENDMENT**

Director of Patents and Trademarks  
Washington, D.C. 20231

Date: October 10, 2000

Sir:

This is a Preliminary Amendment for the above-captioned Continuation application, concurrently filed herewith. Please amend the above-captioned Continuation application as follows:

**IN THE SPECIFICATION:**

Please amend the specification by inserting after the title: --This application is a **continuation** of prior application Serial No. **09/350,923** filed **July 12, 1999**, which is a continuation of prior application Serial No. **09/055,954** filed **April 7, 1998** --.

**IN THE CLAIMS:**

Please amend the claims as follows:

**Claim 4:** Line 1, delete "or 3".

Please add the following claim:

- 29. A lithography system according to claim 3, wherein the resist coated on the substrate is chemically amplified resist. --

**REMARKS**

Claims 1-29 are now pending in this application.

The above amendments to the claims have been made to delete the multiple dependency of the claims and to put the application in better condition for examination. No new matter has been added.

In the event that any fees are due in connection with this paper, please charge our Deposit Account No. 01-2340.

Respectfully submitted,

ARMSTRONG, WESTERMAN, HATTORI,  
McLELAND & NAUGHTON



Donald W. Hanson  
Attorney for Applicant  
Reg. No. 27,133

Atty. Docket No. **980511B**  
Suite 1000  
1725 K Street, N. W.  
Washington, D. C. 20006  
Tel: (202) 659-2930  
Fax: (202) 887-0357  
DWH/SK/fs  
H:\HOME\fsakai\amendment\980511B-pre

## LITHOGRAPHY SYSTEM AND METHOD

### BACKGROUND OF THE INVENTION

The present invention relates to a lithography system, and more particularly, it relates to a lithography system having an exposure apparatus for exposing a substrate to project a pattern onto it on which resist is coated, and a substrate processing apparatus connected to the exposure apparatus and adapted to process the substrate.

In a lithography process mainly effected by an exposure apparatus to manufacture semi-conductor elements and the like, resist is coated on a surface of a substrate such as a wafer by a coater, and, after the substrate is transferred, by a conveying system, to the exposure apparatus, where the exposure process is effected, the exposed substrate is further developed by a developer. In this way, a resist pattern is formed on the substrate. Recently, a so-called coater/developer in which the coater and the developer are integrally incorporated has been used mainly.

In conventional techniques, the coater/developer and the exposure apparatus are separately housed in independent chambers and have independent air-conditioners, and the chambers are controlled to achieve optimum processing conditions (air pressure, temperature, humidity and the like).

Recently, there has been a tendency that exposure light has a short wave length to cope with high density and fine arrangement of an integrated circuit, and, thus, DUV

(Deep Ultra Violet) light such as excimer laser has been used as the exposure light. In correspondence to this, high sensitivity resist such as chemically amplified resist has been used as the resist relatively widely. The chemically  
5 amplified resist is very sensitive to a surrounding chemical environment and is characterized in that it is apt to react with alkaline substances within atmosphere to change its own property. Thus, in the exposure apparatuses and  
coater/developers using the chemically amplified resist,  
10 each chamber is normally provided with a Hepa filter for removing physical dusts and a chemical filter for removing substances (for example, alkaline substances) harmful to the chemically amplified resist.

As clear from the above explanation, in the  
15 lithography process using the chemically amplified resist, it is desirable that the chemically amplified resist is not contacted with the open air or atmosphere from when the resist is coated on the substrate to when the development is completed. To this end, the exposure apparatus and the  
20 coater/developer are often assembled as an in-line system. When the exposure apparatus and the coater/developer are assembled as the in-line system, since there is a problem that a portion (connecting portion) through which the wafer is transferred between both apparatuses is influenced by the  
25 chemical environment, the connecting portion is sealingly enclosed by a cover to provide the same environment as those in the chambers of both apparatuses, while isolating the connecting portion from an external clean room environment.

However, in the in-line system used in the conventional lithography process, the exposure apparatus and the coater/developer are housed in the independent chambers, respectively, and air pressure, temperature and humidity in  
5 each chamber are independently controlled by a corresponding air conditioner. Therefore, the difference in pressure, temperature or/and humidity occurs frequently between both apparatuses, with the result that the environments in both chambers which were controlled with high accuracy affects  
10 each other to worsen the environments.

For example, in the exposure apparatus, due to the change in pressure caused by introduction of air from the coater/developer, refractive index of air is forced to change to thereby change the projection magnification of a  
15 projection optical system, with the result that the magnification control accuracy during the exposure operation is affected by a bad influence or an air fluctuation due to the change of temperature (the temperature fluctuation) occurs. As a result, since measurement error is apt to  
20 occur in laser interferometers for measuring the position of the wafer, stepping accuracy and alignment accuracy of a stage are affected by a bad influence. Also if the humidity is changed, since the refractive index is changed, the similar bad influence would occur.

25 On the other hand, in the coater/developer, while the optimum temperature for development must be maintained, when the air is introduced from the exposure apparatus, the optimum temperature cannot be maintained, whereby developed



result would be affected by a bad influence.

#### SUMMARY OF THE INVENTION

An object of the present invention is to provide a lithography system of in-line type in which environmental  
5 conditions in an exposure apparatus and in a substrate processing apparatus connected to the exposure apparatus do not badly influence each other.

Another object of the present invention is to control environment in an exposure apparatus connected to a  
10 substrate processing apparatus, with high accuracy.

A further object of the present invention is to control an environment in a substrate processing apparatus connected to an exposure apparatus, with high accuracy.

To achieve the above objects, according to the  
15 present invention, there is provided a lithography system comprising an exposure apparatus (20) which exposes a substrate (W) to project a pattern onto it on which resist is coated, a substrate processing apparatus (40) connected to the exposure apparatus and adapted to process the  
20 substrate (W), an environment sensor (60, 62) which measures an environment of at least one of the exposure apparatus (20) and the substrate processing apparatus (40), and a control device (64) which controls the environment of at least one of the exposure apparatus (20) and the substrate  
25 processing apparatus (40) on the basis of a measured value given from the environment sensor in such a manner that the environment in the exposure apparatus (20) becomes substantially the same as the environment in the substrate

processing apparatus (40).

With this arrangement, the environment of at least one of the exposure apparatus and the processing apparatus is measured, and the environment of at least one of the exposure apparatus and the substrate processing apparatus is controlled by the control device on the basis of the measured value given from the environment sensor in such a manner that the environment in the exposure apparatus becomes substantially the same as the environment in the substrate processing apparatus. Thus, even when the substrate is transferred between the exposure apparatus and the substrate processing apparatus, there arises no bad influence between these apparatuses, thereby always processing the substrate correctly in the apparatuses.

In this case, although the environment sensor may be provided in the exposure apparatus or the processing apparatus, it is desirable that the environment sensor is disposed in the vicinity of a connecting portion between the exposure apparatus and the processing apparatus.

In the above-mentioned lithography system, although the environment sensor may measure any environment in the apparatus(es), it is desirable that the environment sensor (60, 62) measures at least one of air pressure, temperature and humidity in the apparatus.

That is to say, the air pressure, temperature and humidity in the apparatus are great influencing factors among environmental conditions affecting an influence between both apparatuses, and, thus, it is more desirable

that at least one of the air pressure, temperature and humidity (preferably, all of them) in one apparatus becomes the same as that (or those) in the other apparatus.

Although the processing apparatus of the  
5 lithography system is not limited to a particular processing apparatus so long as it is an apparatus for processing a substrate before exposure or after exposure can be processed. For example, it is desirable that the processing apparatus has at least one of a resist coating function and  
10 a developing function. In the apparatus having such resist coating function and developing function, since the environmental conditions such as pressure, temperature and humidity in the apparatus must be controlled precisely, when the control is effected in such a manner that the  
15 environmental conditions in both apparatuses become substantially the same, excellent advantages can be achieved.

In the lithography system, the resist coated on the substrate is not defined in particular, but it is desirable  
20 to use a chemically amplified resist. Although the chemically amplified resist has high sensitivity to cope with DUV exposure, excimer laser exposure, X-ray exposure or electron beam exposure, it is very sensitive to the surrounding chemical environment (particularly, apt to react  
25 with alkaline substances). Therefore, it is required that the chemical environment in the exposure apparatus becomes the same as the chemical environment in the processing apparatus. That is to say, since the chemically amplified

resist is required to be disposed within the environment from which harmful chemical substances (alkaline substances in this case) are to be removed from the time when the resist was coated on the substrate to the time when the development is completed. Therefore, by providing chemical filters for removing harmful chemical substances in both the exposure apparatus and the processing apparatus, the chemical environments in both apparatuses can be made the same.

10           The present invention further relates to a lithography method for controlling an environment in an exposure apparatus which is adapted to expose a substrate and which is connected to a substrate processing apparatus which processes the substrate before or after exposure, the  
15   method comprising the steps of obtaining data regarding the environment in said substrate processing apparatus; and controlling the environment in said exposure apparatus on the basis of the obtained data.

          The present invention further relates to a  
20   lithography method for controlling an environment in a substrate processing apparatus which is adapted to process a substrate before or after exposure and which is connected to an exposure apparatus which exposes the substrate before or after the processing, the method comprising the steps of  
25   obtaining data regarding the environment in said exposure apparatus; and controlling the environment in said processing apparatus on the basis of the obtained data.

          The present invention further relates to a method

for making an exposure apparatus which is adapted to expose a substrate and which is connected to a substrate processing apparatus which processes the substrate before or after exposure, the method comprising the steps of providing an  
5 adjusting device which adjusts an environment in said exposure apparatus; and providing a control device which controls said adjusting device on the basis of data regarding the environment in said substrate processing apparatus.

10 The present invention further relates to a method for making a substrate processing apparatus which is adapted to process a substrate and which is connected to an exposure apparatus which exposes the substrate before or after the processing, the method comprising the steps of providing an  
15 adjusting device which adjusts an environment in said substrate processing apparatus; and providing a control device which controls said adjusting device on the basis of data regarding environment in said exposure apparatus.

The present invention further relates to a  
20 lithography method using an exposure apparatus which exposes a substrate and a substrate processing apparatus which processes the substrate before or after exposure, the method comprising the steps of obtaining data regarding an environment in one of said exposure apparatus and said  
25 substrate processing apparatus; and controlling the environment in the other apparatus on the basis of the obtained data.

The present invention further relates to an

exposure apparatus adapted to expose a substrate and connected to a substrate processing apparatus which processes the substrate before or after exposure, the exposure apparatus comprising a chamber disposed around an exposure body system which exposes the substrate; an adjusting device connected to said chamber and adapted to adjust an environment in said chamber; and a control device connected to said adjusting device and adapted to control said adjusting device on the basis of data regarding the environment in said substrate processing apparatus.

The present invention further relates to a substrate processing apparatus adapted to process a substrate and connected to an exposure apparatus which exposes the substrate before or after the substrate processing, the substrate processing apparatus comprising a chamber disposed around a substrate processing body system which processes the substrate an adjusting device connected to said chamber and adapted to adjust an environment in said chamber; and a control device connected to said adjusting device and adapted to control said adjusting device on the basis of data regarding environment in said exposure apparatus.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic perspective view of a lithography system according to a preferred embodiment of the present invention; and

Fig. 2 is a block diagram of an environment control portion and other portions associated with it, of the

lithography system of Fig. 1.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Now, a preferred embodiment of the present invention will be explained with reference to the  
5 accompanying drawings.

Fig. 1 is a schematic perspective view of a lithography system according to a preferred embodiment of the present invention.

The lithography system 10 includes an exposure  
10 apparatus 20 for effecting exposure in a step-and-repeat manner, a coater/developer 40 as a processing apparatus for effecting development after resist was coated on a wafer W and the exposure was effected, and a connecting portion 50 for connecting the exposure apparatus 20 to the  
15 coater/developer 40 and for providing a sealed space through which the wafer W is transferred. That is to say, the exposure apparatus 20 and the coater/developer 40 are assembled to form as an in-line system.

The exposure apparatus 20 includes an exposure  
20 chamber 24 for the exposure apparatus, and an exposure apparatus body 22 and a wafer loader 26 which are housed in the exposure chamber 24. An air conditioning portion 28 for the exposure apparatus is disposed adjacent to the exposure chamber 24, and air conditioning (air adjustment) of the  
25 exposure chamber 24 is performed by an air conditioner (not shown) in the air conditioning portion 28.

The air conditioning portion may be an air conditioning portion described in U.S. Serial No. 08/824,467

filed on March 26, 1997.

An excimer laser 30 disposed out of the exposure chamber 24 is used as an exposure light source of the exposure apparatus body 22, and a laser beam emitted from the excimer laser 30 is directed to the exposure apparatus body 22 through a beam matching unit (BMU) 32. The laser beam (exposure light) introduced into the exposure apparatus body 22 is uniformly illuminated onto a pattern area on a reticle R through an illumination optical system 34. As a result, a pattern formed on the reticle R is projected onto a predetermined shot area on the wafer (substrate) on which resist was coated, through a projection optical system PL.

The wafer W is held on a wafer stage by vacuum suction via a wafer holder (not shown), which wafer stage can be shifted in an X-direction (left-and-right direction in Fig. 1) and a Y-direction (right-and-inclined backward direction in Fig. 1). X, Y positions of the wafer W are accurately measured with a predetermined resolving power (for example, 0.5-1 nm) by an X interferometer 38X and a Y interferometer 38Y through an X shift mirror 37X disposed on the wafer stage 36 and extending in the Y-direction and a Y shift mirror 37Y extending in the X-direction, respectively.

The wafer loader 26 serves to convey (i.e., load and unload) the wafer W with respect to the wafer stage 36 of the exposure apparatus body 22 and to transfer the wafer W between the exposure apparatus body 22 and a coater/developer body 42 through the connecting portion 50.

The air conditioning portion 28 for the exposure



apparatus serves to control the interior of the exposure chamber 24 to a predetermined pressure value which is positive (pressure) with respect to an external clean room. This is done because external dusts are prevented from  
5 entering the exposure apparatus body 22 and the pressure in the chamber is prevented from changing during the exposure operation to prevent the change in refractive index of light, thereby effecting proper exposure. Further, in the air conditioning portion 28 of the exposure apparatus, when  
10 the air in the exposure chamber 24 is circulated by a blower constituting a part of the air conditioner (not shown), the temperature in the chamber 24 is controlled to a predetermined value by adjusting not only cooling of air effected by a cooler constituting a part of the air  
15 conditioner but also heating of air effected by a heater. The temperature control of the exposure chamber 24 is effected within a range of about  $\pm 1/10^{\circ}\text{C}$  with respect to the predetermined temperature value. Further, in the air conditioning portion 28 of the exposure apparatus, humidity  
20 in the chamber 24 is controlled to a predetermined value. In this case, however, the humidity is not adjusted directly, but is adjusted indirectly by controlling the pressure and temperature in the chamber 24.

A Hepa filter and a chemical filter are provided on  
25 a partition wall between the air conditioning portion 28 and the exposure chamber 24. Physical dusts are removed by the Hepa filter and substances (alkaline substances) chemically harmful to the chemically amplified resist is removed by the

chemical filter, with the result that a clean condition is maintained within the exposure chamber 24 physically as well as chemically.

5 The coater/developer 40 includes a coater/developer chamber 44, and a coater/developer body 42 housed in the coater/developer chamber 44. An air conditioning portion 46 for the coater/developer is disposed above and adjacent to the coater/developer chamber 44, and air in the coater/developer chamber 44 is adjusted by the air  
10 conditioning portion 46 for the coater/developer.

In the coater/developer body 42, prior to the exposure, high sensitive chemically amplified resist is coated on the wafer W by a spinning manner, and, after the exposure operation, developing treatment is effected. Since  
15 the developing treatment sensitively reacts to a temperature condition to affect an influence upon a developed result, it is desirable that the developing treatment is performed at a position (where the developing treatment is not influenced by the change in temperature) remote from the connecting  
20 portion 50 (described later) between the coater/developer and the exposure apparatus 20. Similar to the air conditioning portion 28 for the exposure apparatus, the air conditioning portion 46 for the coater/developer serves to maintain the pressure, temperature and humidity in the  
25 coater/developer chamber 44 at the predetermined values.

Further, since the Hepa filter and the chemical filter are provided on a partition wall between the air conditioning portion 46 and the chamber 44, physical dusts

and chemically harmful substances are removed, with the result that a clean condition is maintained within the chamber 44 physically as well as chemically.

Similar to the apparatuses 20, 40, the connecting  
5 portion 50 is sealingly closed by a cover so that, when the wafer W is transferred between the exposure chamber 24 and the coater/developer chamber 44, the wafer W on which the chemically amplified resist was coated is maintained under a clean condition physically as well as chemically.

10 In the illustrated embodiment, as shown in Figs. 1 and 2, environment sensors 60, 62 for measuring environmental conditions in the chambers 24, 44 are disposed within the chambers 24, 44 in the vicinity of the connecting  
15 portion 50, and there is provided an environment control portion 64 as a control device for controlling the environmental conditions in the chambers on the basis of measured values given from the environment sensors 60, 62. The environment sensors 60, 62 are sensors capable of measuring the environmental conditions (such as pressure,  
20 temperature and humidity) in the chambers and each sensor is constituted by a barometer, a thermometer and a hygrometer. In the environment control portion 64, the difference in pressure, the difference in temperature and the difference in humidity between the chambers 24 and 44 are calculated on  
25 the basis of the measured results given from the environment sensors 60, 62. The environment control portion 64 controls the air conditioning portion 28 for the exposure apparatus and the air conditioning portion 46 for the coater/developer

so that the differences of the environmental conditions in the chambers 24, 44 becomes substantially zero, thereby making the environmental conditions in the chambers 24, 44 substantially the same. In this case, the barometers, 5 thermometers and hygrometers constituting the environment sensors 60, 62 are previously calibrated to adjust the sensitivity therebetween. With this arrangement, the difference in pressure, the difference in temperature and the difference in humidity between both apparatuses can be 10 measured correctly.

Next, a lithography process of the lithography system 10 having the above-mentioned construction will be briefly described.

First of all, the wafer W is set on the 15 coater/developer body 42 shown in Fig. 1. When the predetermined input is inputted by an operator through an input device (not shown) of the exposure apparatus body 22, a command is sent to the coater/developer body 42 through the in-line system, with the result that the chemically 20 amplified resist is coated on the wafer W under the desired condition. The wafer W on which the chemically amplified resist was coated is conveyed to the connecting portion 50 and then is transferred onto the wafer loader 26 of the exposure apparatus.

25 The wafer loader 26 which received the wafer W rests the wafer W on the wafer stage 36 of the exposure apparatus body 22. In this condition, the laser beam from the excimer laser 30 is directed to the illumination optical

system 34 through the BMU 32, thereby illuminating the pattern area on the reticle R. As a result, the pattern on the reticle R is projected with a reduced scale onto the wafer set on the wafer stage 36 through the projection  
5 optical system PL.

Since the exposure apparatus body 22 according to the illustrated embodiment is a stepper, the wafer stage 36 is stepingly shifted successively in accordance with the exposure sequence to successively expose a plurality of shot  
10 areas on the wafer. In this way, the exposure process is repeated.

When the exposure regarding second and other layers is effected, since alignment marks as well as the pattern were already printed on the wafer W, after several number of  
15 alignment marks are measured by an alignment sensor 39, a shot arrangement on the wafer is calculated on the basis of a measured result from the alignment sensor by using a so-called enhanced-global-alignment (EGA) technique. On the basis of this shot arrangement, an overlap exposure  
20 operation is effected while shifting the wafer stage 36 in a step manner. When the stepping and alignment are performed, the position of the wafer stage 36 is controlled on the basis of positional information from the laser interferometers 38X, 38Y.

25 After the reticle pattern was exposed on all of the shot areas of the wafer, the wafer W is conveyed again from the wafer stage 36 to the connecting portion 50 by the wafer loader 26 and is transferred to the coater/developer body 42

disposed within the coater/developer chamber 44. In the coater/developer body 42, the transferred wafer W is developed with a desired condition. After the development, the wafer W is conveyed to a wafer removing position (not shown) in the coater/developer chamber 44 and then is advanced to a next processing stage.

In the lithography system 10 according to the illustrated embodiment, the lithography process as mentioned above is effected. During the lithography process, the air conditioning portion 28 for the exposure apparatus and the air conditioning portion 46 for the coater/developer are always controlled by the environment control portion 64 in such a manner that the environmental conditions (such as pressure, temperature and humidity) in both chambers 24, 44 become substantially the same. For example, if the difference in pressure between both chambers 24 and 44 is generated, the rotation of the fans in the air conditioning portion 28 for the exposure apparatus and the air conditioning portion 46 are controlled, or dimensions of variable air introduction openings (not shown) of the air conditioning portions for introducing external air are controlled in such a manner that the difference in pressure between the chambers 24 and 44 becomes substantially zero. Further, if the difference in temperature or humidity is generated, the coolers, heaters and fans of both air conditioning portions 28, 46 are controlled in such a manner that the difference in temperature or humidity becomes substantially zero.

In the illustrated embodiment, both chambers 24 and 44 are interconnected and the connecting portion 50 through which the wafer W is transferred is sealingly covered. Thus, so long as the environmental conditions in both  
5 chambers 24, 44 are the same as each other, when the wafer W is transferred, even if both chambers 24, 44 are communicated with each other, the environmental conditions (such as pressure, temperature and humidity) are hardly changed, with the result that the proper processing can be  
10 performed in the exposure apparatus body 22 and the coater/developer body 42.

As mentioned above, according to the lithography system 10 according to the illustrated embodiment, during the lithography process, the environmental conditions in the  
15 exposure chamber 24 in which the exposure apparatus body 22 is housed and in the coater/developer chamber 44 in which the coater/developer body 42 is housed are measured by using the environment sensors 60, 62 comprised of the barometer, thermometer and hygrometer which were previously calibrated  
20 with high accuracy, and both air conditioning portions 28, 46 are controlled by the environment control portion 64 on the basis of the measured results in such a manner that the environmental conditions in both chambers 24, 44 become the same. Accordingly, the environmental conditions in the  
25 chambers of the exposure apparatus and the coater/developer do not affect each other, and, particularly, in the exposure apparatus body 22, accuracy of magnification control during the exposure, stepping accuracy of the wafer stage 36 and

alignment accuracy are not worsened, with the result that the exposure can be performed with high accuracy as is in the exposure apparatus 20 alone in spite of the fact that the exposure apparatus is combined with the coater/developer  
5 so as to form the in-line system.

In the lithography system 10 according to the illustrated embodiment, since the air pressures in the chambers are controlled so that there is no difference in pressure between the exposure apparatus 20 and the  
10 coater/developer 40, the dust agitation which would be caused by fresh air flowing into the connecting portion 50 can be prevented, thereby improving the yielding percentage of manufacture of the semi-conductor elements.

In the illustrated embodiment, while an example  
15 that the exposure apparatus body 22 and the coater/developer body 42 are housed within one chamber, respectively, was explained, the present invention is not limited to such an example, but, for example, the exposure apparatus body and the wafer loader portion 26, or the coater portion,  
20 developer portion and conveying portion and the like may be housed in separate chambers, respectively. In this case, particularly, the command from the environment control portion 64 may be sent to air conditioners for controlling environmental conditions in each of chambers of two  
25 apparatuses which are interconnected via a portion (similar to the connecting portion 50) through which the wafer is transferred.

Further, in the illustrated embodiment, while an



example that the environmental conditions in the exposure chamber 24 and the coater/developer chamber 44 are adjusted by using the air conditioning portion 28 for the exposure apparatus and the air conditioning portion 46 for the coater/developer was explained, the present invention is not limited to such an example, but, there may be provided devices capable of adjusting the environmental conditions such as air pressure, temperature and humidity in the chambers independently from the air conditioning portions.

10 In the illustrated embodiment, while an example that the air pressures in the respective chambers are measured by the barometer to calculate the difference in pressure was explained, the difference in pressure may be directly measured by using a differential pressure gauge.

15 Further, in the illustrated embodiment, while an example that the environment sensors 60, 62 are disposed, respectively, within both chambers of the exposure apparatus and the coater/developer was explained, the present invention is not limited to such an example, but, an environment sensor may be disposed within one of the chambers (for example, coater/developer chamber) and the environment control portion 64 may effect the control so that the environment condition in this chamber approaches to a target value of the environmental condition in the chamber of the other apparatus (for example, exposure apparatus).

25 Incidentally, in the illustrated embodiment, while an example that the environmental conditions measured by the environment sensors 60, 62 are air pressure, temperature and

humidity was explained, the environmental conditions are not limited to such air pressure, temperature and humidity (three conditions), other environmental conditions may be measured to coincide the environmental conditions in both chambers with each other. Further, all of the above-mentioned three conditions are not necessarily measured, but, only the air pressure and temperature may be measured to effect the controlled, or only the pressure may be measured and the control may be effected so that the difference in pressure between both chambers becomes zero. The reason is that, if the difference in pressure between both chambers becomes zero, since flow-in and flow-out of air would not occur between both chambers. Therefore, even if there are some difference in temperature and/or humidity, the influence of the difference in temperature and/or humidity would not become so great.

In the illustrated embodiment, while an example that the exposure apparatus body 22 constituting the lithography system is the stepper was explained, the present invention is not limited to such an example, but, a scan exposure apparatus of step-and-scan type may be used, thereby capable of obtaining the same effect as the illustrated embodiment.

As mentioned above, according to the present invention, an excellent lithography system of in-line type in which environmental conditions in an exposure apparatus and a substrate processing apparatus connected to the exposure apparatus do not badly influence each other can be

provided.

The entire disclosure of Japanese Patent  
Application No. 9(1997)-103,814 filed on April 7, 1997  
including specification, claims, drawings and summary is  
5 incorporated herein by reference in its entirety.

WHAT IS CLAIMED IS:

1. A lithography system including an exposure apparatus which exposes a substrate to project a pattern onto it on which resist is coated, and a substrate processing apparatus connected to said exposure apparatus and adapted to process the substrate, the system comprising:

an environment sensor which measures an environment of at least one of the said exposure apparatus and said substrate processing apparatus; and

a control device which controls the environment of at least one of said exposure apparatus and said substrate processing apparatus on the basis of a measured value given from said environment sensor in such a manner that the environment in said exposure apparatus becomes substantially the same as the environment in said substrate processing apparatus.

2. A lithography system according to claim 1, wherein said environment sensor measures at least one of pressure, temperature and humidity in said apparatus.

3. A lithography system according to claim 2, wherein said substrate processing apparatus has at least one of a resist coating function and a developing function.

4. A lithography system according to claim 1 or 3, wherein the resist coated on the substrate is chemically amplified resist.

5. A lithography method for controlling an environment in an exposure apparatus which is adapted to expose a substrate and which is connected to a substrate processing

apparatus which processes the substrate before or after exposure, the method comprising the steps of:

obtaining data regarding the environment in said substrate processing apparatus; and

controlling the environment in said exposure apparatus on the basis of the obtained data.

6. A method according to claim 5, wherein said substrate processing apparatus includes at least one of a coater which coats sensitive agent on the substrate before the exposure and a developer which develops the substrate after the exposure.

7. A method according to claim 5, wherein the environment in said exposure apparatus is controlled to be substantially the same as the environment in said substrate processing apparatus.

8. A method according to claim 5, wherein the data relates to at least one of air pressure, temperature and humidity.

9. A method according to claim 5, wherein said exposure apparatus and said substrate processing apparatus are housed in independent chambers.

10. A method according to claim 5, wherein said exposure apparatus and said substrate processing apparatus are assembled as an in-line system.

11. A method according to claim 5, wherein chemically amplified resist is coated on the substrate.

12. A lithography method for controlling an environment in a substrate processing apparatus which is adapted to

process a substrate before or after exposure and which is connected to an exposure apparatus which exposes the substrate before or after the processing, the method comprising the steps of:

obtaining data regarding the environment in said exposure apparatus; and

controlling the environment in said processing apparatus on the basis of the obtained data.

13. A processing apparatus according to claim 12, wherein it includes at least one of a coater which coats sensitive agent on the substrate before the exposure and a developer which develops the substrate after the exposure.

14. A processing apparatus according to claim 12, wherein the environment in said substrate processing apparatus is controlled to be substantially the same as the environment in said exposure apparatus.

15. A processing apparatus according to claim 12, wherein the data relates to at least one of air pressure, temperature and humidity.

16. A method according to claim 12, wherein said exposure apparatus and said substrate processing apparatus are housed in independent chambers.

17. A method according to claim 12, wherein the data relates to at least one of air pressure, temperature and humidity.

18. A method according to claim 12, wherein said exposure apparatus and said processing apparatus are housed in independent chambers.

19. A method according to claim 12, wherein said exposure apparatus and said processing apparatus are assembled as an in-line system.

20. A method for making an exposure apparatus which is adapted to expose a substrate and which is connected to a processing apparatus which processes the substrate before or after exposure, the method comprising the steps of:

providing an adjusting device which adjusts an environment in said exposure apparatus; and

providing a control device which controls said adjusting device on the basis of data regarding the environment in said substrate processing apparatus.

21. A method according to claim 20, wherein said substrate processing apparatus includes at least one of a coater which coats sensitive agent on the substrate before the exposure and a developer which develops the substrate after the exposure.

22. A method according to claim 20, wherein the data relates to at least one of air pressure, temperature and humidity.

23. A method for making a substrate processing apparatus which is adapted to process a substrate and which is connected to an exposure apparatus which exposes the substrate before or after the processing, the method comprising the steps of:

providing an adjusting device which adjusts an environment in said substrate processing apparatus; and

providing a control device which controls said

adjusting device on the basis of data regarding the environment in said exposure apparatus.

24. A method according to claim 23, wherein said substrate processing apparatus includes at least one of a coater which coats sensitive agent on the substrate before the exposure and a developer which develops the substrate after the exposure.

25. A method according to claim 23, wherein the data relates to at least one of air pressure, temperature and humidity.

26. A lithography method using an exposure apparatus which exposes a substrate and a substrate processing apparatus which processes the substrate before or after exposure, the method comprising the steps of:

obtaining data regarding an environment in one of said exposure apparatus and said substrate processing apparatus; and

controlling the environment in the other apparatus on the basis of the obtained data.

27. An exposure apparatus adapted to expose a substrate and connected to a substrate processing apparatus which processes the substrate before or after exposure, the exposure apparatus comprising:

a chamber disposed around an exposure body system which exposes the substrate;

an adjusting device connected to said chamber and adapted to adjust an environment in said chamber; and

a control device connected to said adjusting device



and adapted to control said adjusting device on the basis of data regarding the environment in said substrate processing apparatus.

28. A substrate processing apparatus adapted to process a substrate and connected to an exposure apparatus which exposes the substrate before or after the substrate processing, the substrate processing apparatus comprising:

a chamber disposed around a substrate processing body system which processes the substrate;

an adjusting device connected to said chamber and adapted to adjust an environment in said chamber; and

a control device connected to said adjusting device and adapted to control said adjusting device on the basis of data regarding environment in said exposure apparatus.

## LITHOGRAPHY SYSTEM AND METHOD

### ABSTRACT OF THE DISCLOSURE

A lithography system of in-line type includes environment sensors disposed within a chamber in which an exposure apparatus body is housed and a chamber in which a coater/developer body is housed. During a lithography process, on the basis of measured values such as air pressure temperature and humidity measured by the environment sensors, an environment control portion controls air conditioning portions in such a manner that the environmental conditions in the chambers becomes substantially the same as each other. Whereby, even when a wafer is transferred through a connecting portion, the environmental conditions in the chambers do not badly influence each other.


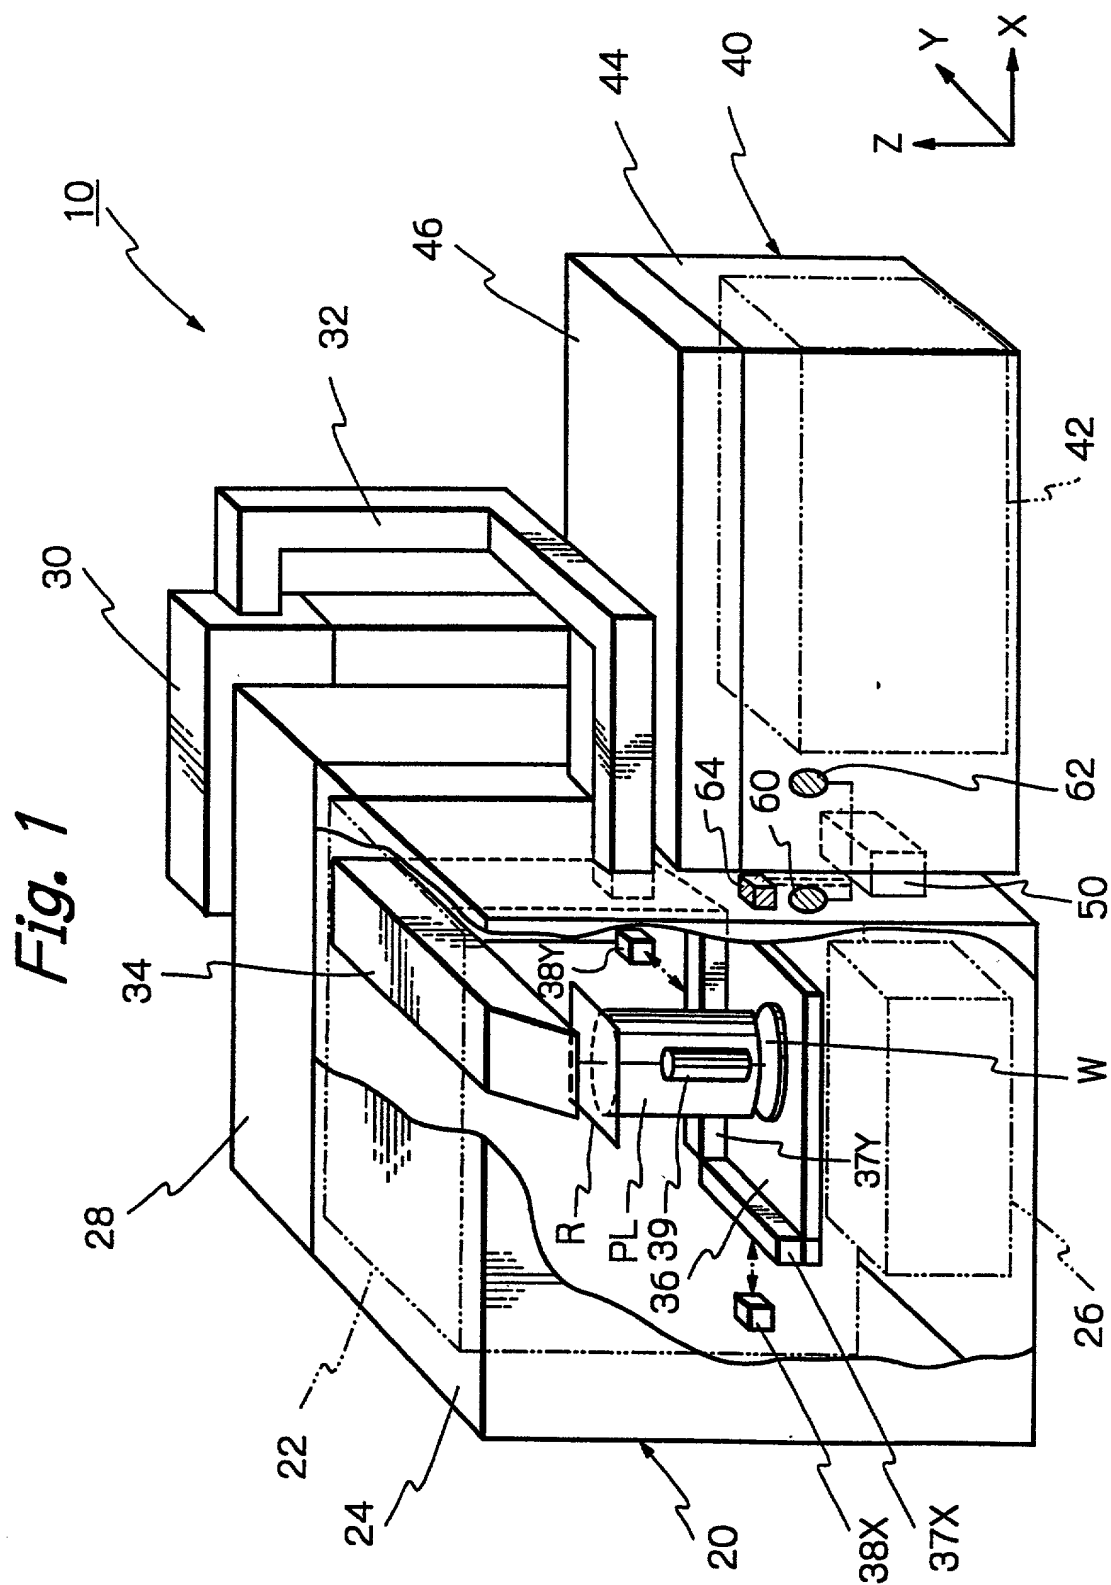


FIG. 2 is a block diagram of an environment control system. The system includes an environment control portion (64) that receives input from two environment sensors (60, 62) and controls two air conditioning portions (28, 46). The first air conditioning portion (28) is for exposure apparatus, and the second (46) is for a coater/developer.

*Fig. 2*

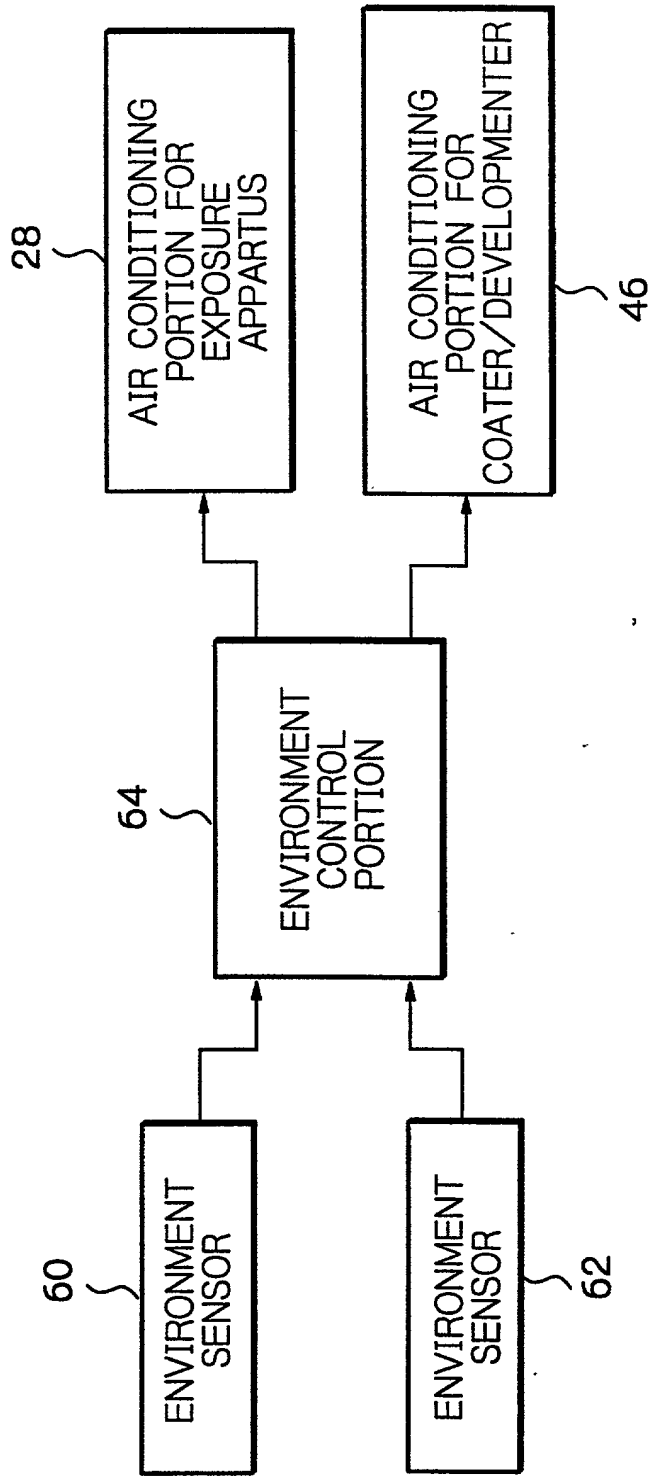

# Declaration For U.S. Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

(Insert Title) LITHOGRAPHY SYSTEM AND METHOD

the specification of which is attached hereto unless the following is checked:

was filed on April 7, 1998 as United States Application Number or PCT International  
☒ Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_  
 (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 (a) - (d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

(List prior foreign applications. See note A on back of this page)

(Number)	(Country)	(Day/Month/Year Filed)	Priority Claimed <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<u>103814/1997</u>	<u>Japan</u>	<u>7/4/1997</u>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

(See note B on back of this page)

☐ See attached list for additional prior foreign applications

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
_____ (Application Number)	_____ (Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of the application:

(List Prior U.S. Applications)

(Application Serial Number)	(Filing Date)	(Status) (patented, pending, abandoned)
_____ (Application Serial Number)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

James E. Armstrong, III, Reg. No. 18,366; William F. Westerman, Reg. No. 29,988; Ken-Ichi Hattori, Reg. No. 32,861; Le-Nhung McLeland, Reg. No. 31,541; Ronald F. Naughton, Reg. No. 24,616; John R. Pegan, Reg. No. 18,069; William G. Kratz, Jr., Reg. No. 22,631; Albert Tockman, Reg. No. 19,722; Mel R. Quintos, Reg. No. 31,898; Donald W. Hanson, Reg. No. 27,133; Stephen G. Adrian, Reg. No. 32,878; William L. Brooks, Reg. No. 34,129; John F. Carney, Reg. No. 20,276; Edward F. Welsh, Reg. No. 22,455; Patrick D. Muir, Reg. No. 37,403; Gay A. Spahn, Reg. No. 34,978; and John P. Kong, Reg. No. 40,054.

Please direct all communications to the following address:

ARMSTRONG, WESTERMAN, HATTORI,  
McLELAND & NAUGHTON  
1725 K Street, N.W., Suite 1000  
Washington, D.C. 20006  
Telephone: (202) 659-2930 Fax: (202) 887-0357

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18 of the United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name) Yosuke SHIRATA

(See note  
C above)

Inventor's Signature Yosuke Shirata Date May 27, 1998

Residence Tokyo, Japan Citizenship Japanese

Post Office Address c/o Nikon Corporation of 2-3, Marunouchi 3-chome,  
Chiyoda-ku, Tokyo, Japan

Full name of second inventor (given name, family name) \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of third inventor (given name, family name) \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of fourth inventor (given name, family name) \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of fifth inventor (given name, family name) \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of sixth inventor (given name, family name) \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of seventh inventor (given name, family name) \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of eighth inventor (given name, family name) \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_